


MYRRA P/N 74215	Type FLYBACK	Outputs 5 + 15 + 24 V	Size E16
---------------------------	------------------------	---------------------------------	--------------------

Product designation

FLYBACK TRANSFORMER - E16 - 5 + 15 + 24 V - 12 W

I MECHANICAL CHARACTERISTICS - PINOUT

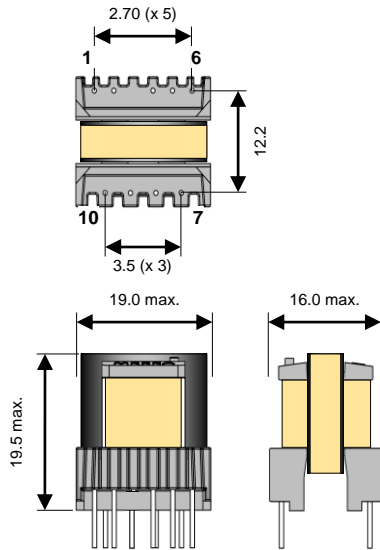


Terminals	
Pins	Ø 0.60 +/- 0.10 mm
PCB recommended drilling diameter	1.1 mm
Pins length	4.0 +/- 0.5 mm
Missing pin	position 3
Tolerances	
General tolerance	+/- 0.5 mm
Pins pitch tolerance	+/- 0.25 mm
Pins row tolerance	+/- 0.5 mm

II ELECTRICAL CHARACTERISTICS - ENVIRONMENTAL

Typical use at ambient 50 °C

MYRRA P/N	Maximum output power	Windings					
		Pins	Turns	Voltage	Maximum current	Inductance (+/- 10 %)	
74215	12.0 W	P	4 - 6	120	85 ~ 265 V _{rms}	0.50 A _{pk}	1.8 mH
		Aux.	2 - 1	14	12.0 V _{DC}	0.20 A _{DC}	
		S1	9 - 10	6	5.0 V _{DC}	1.50 A _{DC}	
		S2	8 - 10	17	15.0 V _{DC}	0.60 A _{DC}	
		S3	7 - 10	27	24.0 V _{DC}	0.40 A _{DC}	

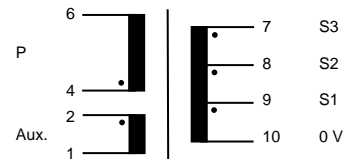

Operating temperature - 40 / + 120 °C (including temperature rise)
Storage temperature - 40 / + 85 °C

III SAFETY - APPROVAL

RoHS and REACH compliant
UL94 V-0 materials
Construction conforms to the certified MYRRA Class B UL Electrical Insulation System E113497-B1
Primary + Auxiliary / Secondaries insulation :
Reinforced insulation as per IEC60335, IEC60950-1 and IEC61558-2-16
PD2 - creepage distances ≥ 6.0 mm
4.0 kV dielectric test



July, 15th 2019